




Appl. No. 10/723,737  
Submission of Formal Drawings Dated 5/18/04  
Reply to Notice to File Corrected Application  
Papers of 2/27/04  
Replacement Sheet Fig. 5

BEFORE STRIP AND AFTER A RR6625-25B PROCESS

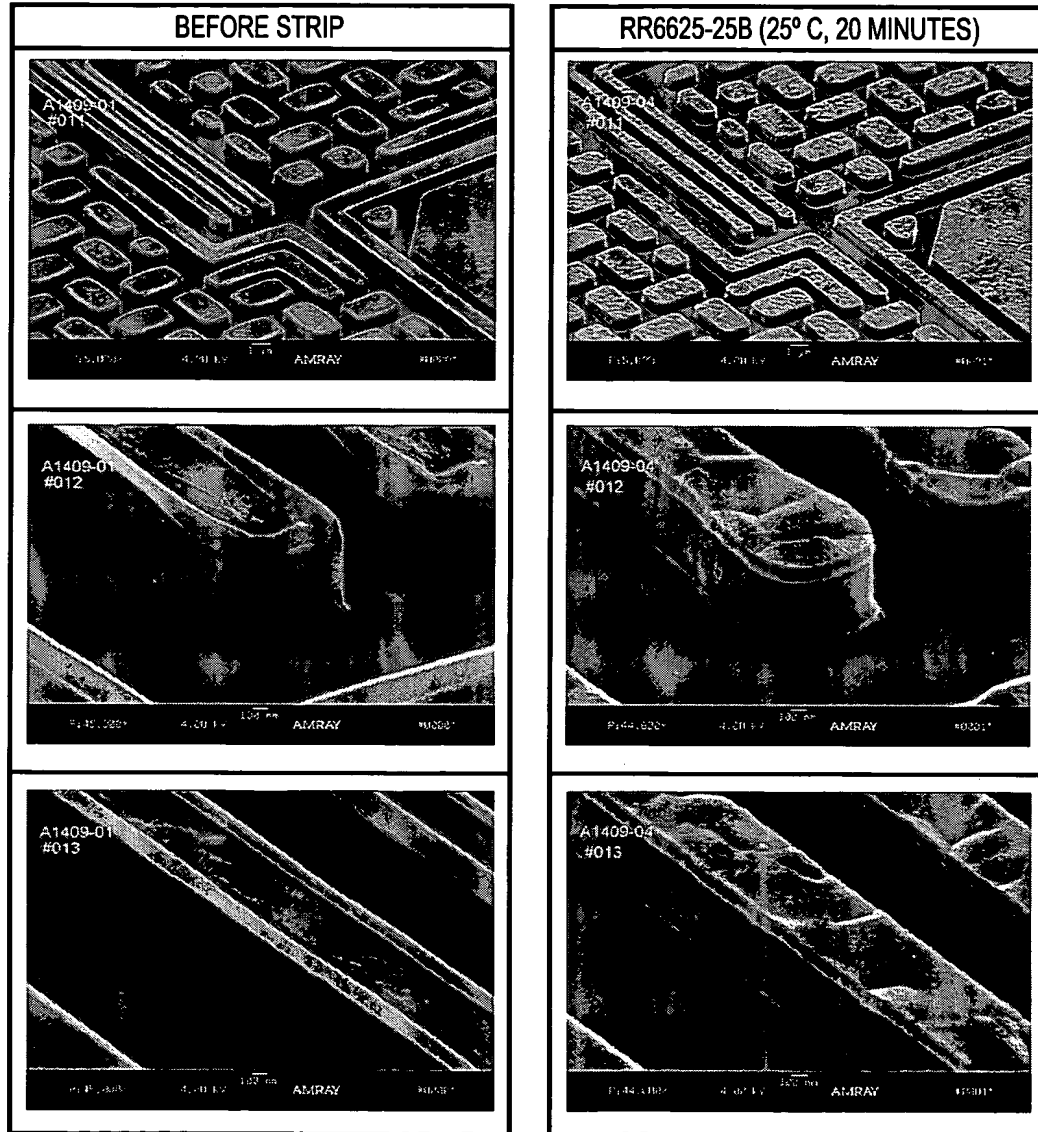


RR6625-25B (25°C, 20 MIN) → DI WATER (AMBIENT, 3 MIN) → N<sub>2</sub> BLOW DRY

**FIG. 5**

BEST AVAILABLE COPY

COMPARISON OF THREE FLOURIDE-CONTAINING STRIPPERS ON A VIA

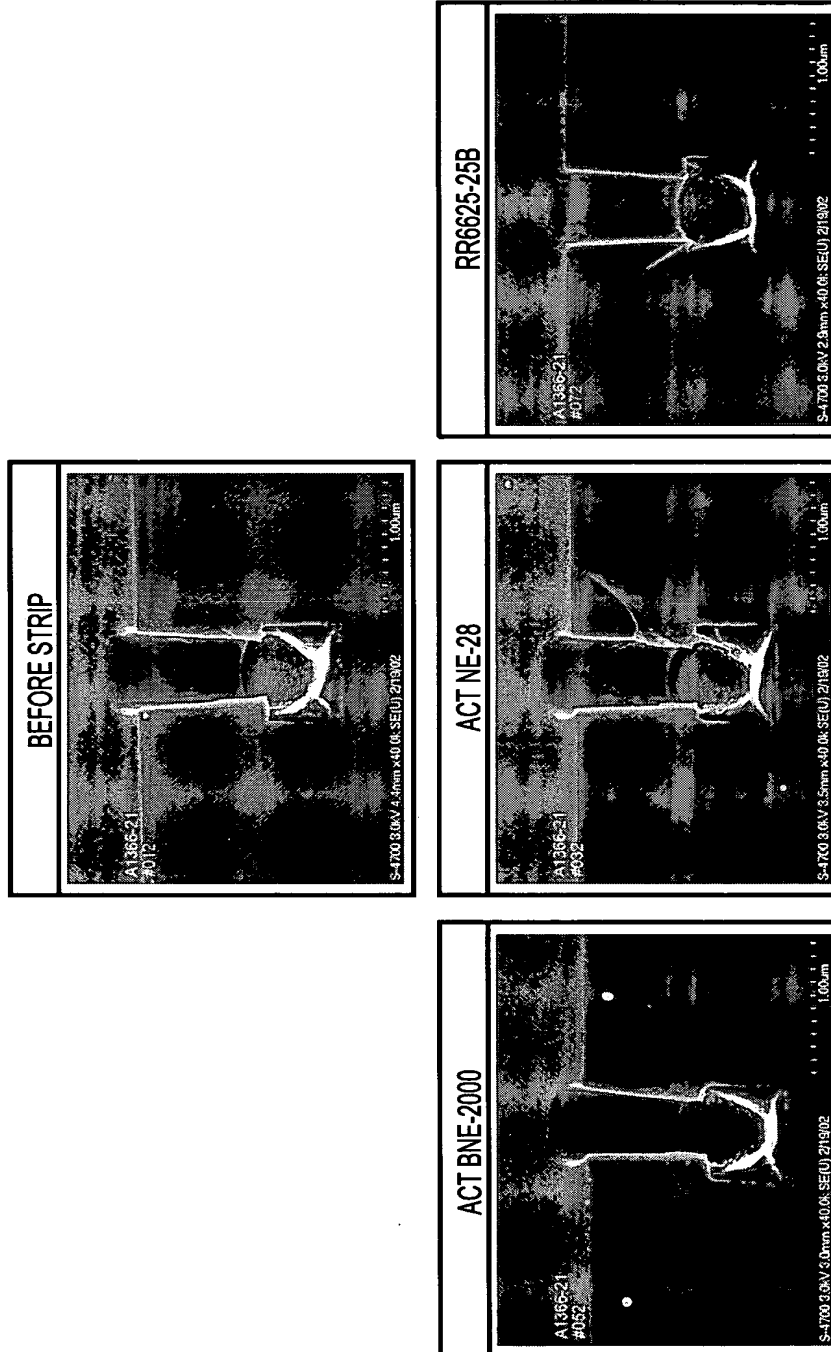

ACT STRIPPER (25°C, 20 MIN) → DI WATER (AMBIENT, 3 MIN) → N<sub>2</sub> BLOW DRY

**FIG. 6**